



4-Port High Power PoE Switch



FSW-0513 (-Z)

H/W Version: 1


FSW-0513 (-Z) is a 10/100 Mbps Fast Ethernet Switch with 4 High-Power Power over Ethernet ports and one uplink port. With a total power budget of 120W, FSW-0513 (-Z) is excellent for deploying network devices that require high-power such as outdoor security dome cameras and access points. And with high-power PoE, the reach of devices can be extended hundreds of meters.

With 4 dip switches, each PoE port can be manually set for On-Off control. The internal PoE power supply

can send up to 48 Watts to a single port. FSW-0513 (-Z) is compact in size, making it ideal for desktop users with limited space. You also have option of installing several FSW-0513 (-Z) in a 19" chassis (POC-6000) for a large-scale rack-mount PoE solution.

Power Protection

FSW-0513 (-Z) supports power protections as OVP (Over Voltage Protection), OCP (Over Current Protection), robust short-circuit protection and surge protection.

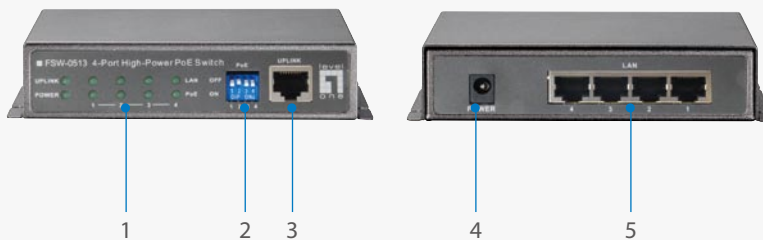

1. LEDs
2. PoE On-Off dip Switch
3. 10/100 Mbps Uplink Port
4. External power socket
5. High Power PoE Ports

Key Features

- 4-Port High Power PoE + 1 Port Uplink Fast Ethernet Switch
- Control Per PoE port on-off by dip switch
- Power Budget : 120W
- Plug and Play
- Power protection: OVP/OCP/OTP

Works well with



POC-6000

8-Bay High Power PoE Chassis for FSW-0503(-Z) / FSW-0513(-Z) & GEP-0520(-Z)



FCS-1091

Day/Night PoE Network Camera

Technical Specifications

Standard Compliance	
IEEE 802.3	10-BASE-T Ethernet
IEEE 802.3u	100-BASE-TX
IEEE 802.3x	Flow Control
Interface	
5 x 10/100Mbps Auto-negotiation, Auto-MDIX ports	
4 x 10/100Mbps Auto-negotiation, Auto-MDIX PoE ports	
Protocol	
CSMA/CD	
Switching Method	
Store-and-Forward switching architecture	
Transfer Rate	
14,880 pps for 10Mbps	
148,800 pps for 100Mbps	
MAC Address Table	
2K	
Buffer	
512K bits	
PoE Spec	
Supports up to 30W for each PoE port	
PoE power budget : 120W	
PoE power on RJ-45 pin 4,5,7,8	
LEDs	
Power, Uplink , LAN (1 to 4) , PoE (1 to 4)	

Power Supply

Input

90-260VAC

50~60Hz

Output

48VDC/2.7A

External power

Power Consumption

Maximum output 130W

Temperature

Operating: 0 to 50°C

Humidity

10 to 90% RH (non-condensing)

Dimensions (L x W x H)

120mm x 90mm x 28mm

Weight

1.2kg


EMI and Safety

CE/ FCC

FSW-0513 (-Z) output power table list

Enable PoE on	Port 1	Port 2	Port 3	Port 4	Enable Port
PoE output Power	48W	OFF	OFF	OFF	1 port
PoE output Power	48W	48W	OFF	OFF	2 Ports
PoE output Power	40W	40W	40W	OFF	3 Ports
PoE output Power	30W	30W	30W	30W	4 Ports

Product Diagram

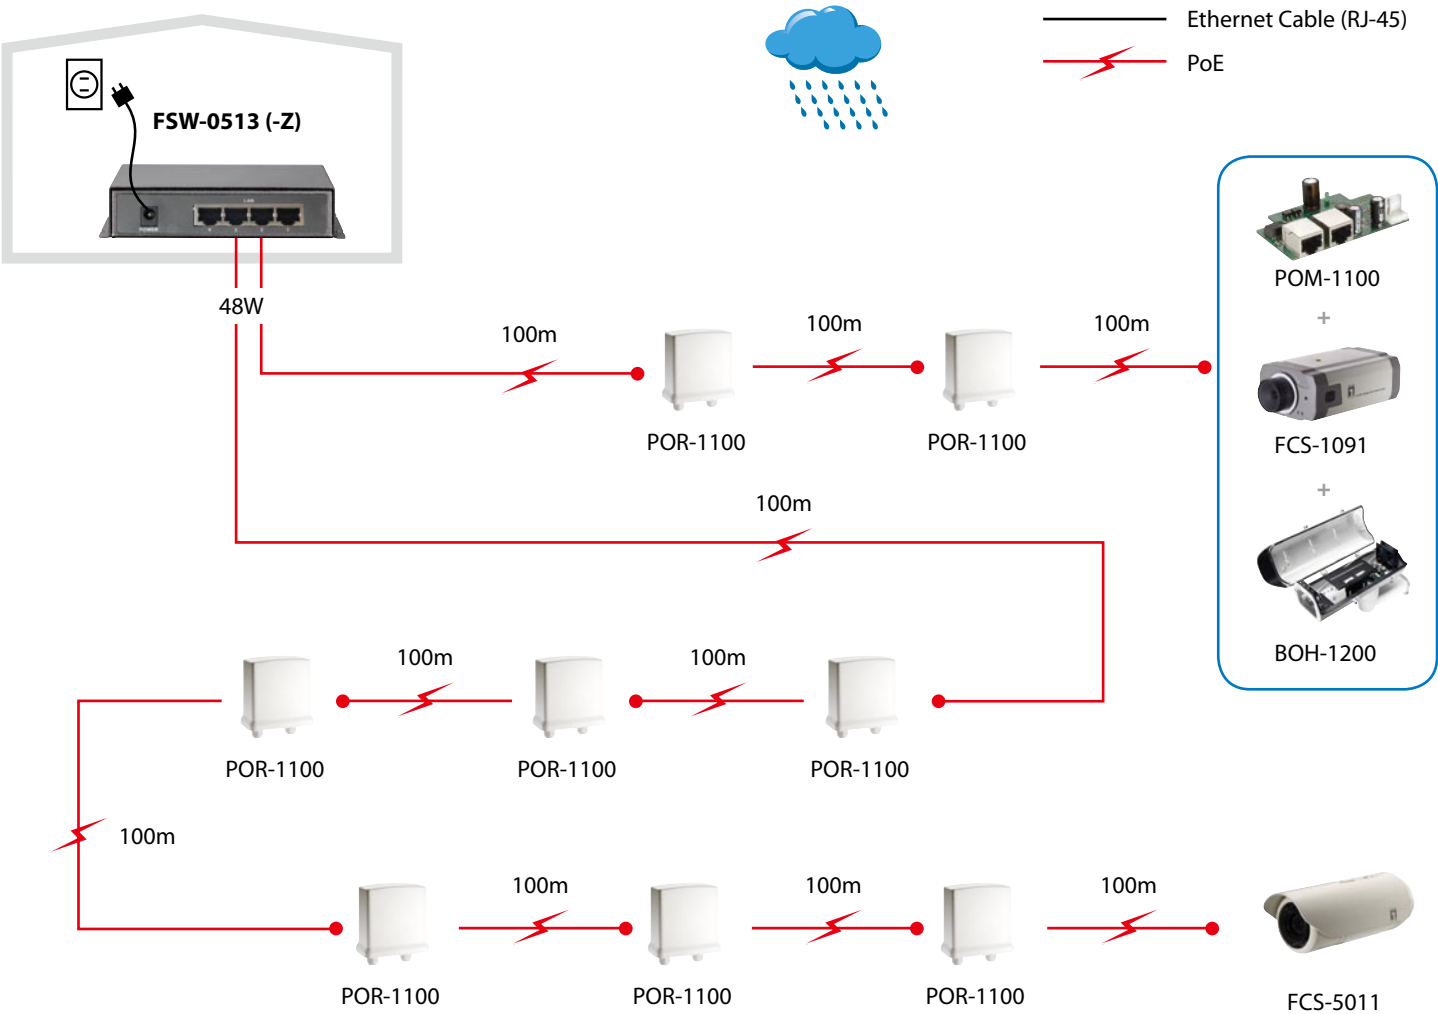

Note: These distances are typical results when used with 18~19Ω 24 AWG Cat.5 Cable

Order Information

FSW-0513: 4-Port High Power PoE Switch

FSW-0503-Z: 4-Port High Power PoE Switch (no power included)

Package Contents

FSW-0513: FSW-0513 x 1, Power Adapter x 1, User Manual x 1

FSW-0513-Z: FSW-0513 x 1, User Manual x 1

Optional Accessories



POC-6000

8-Bay High Power PoE Chassis for
FSW-0503(-Z) / FSW-0513(-Z) &
GEP-0520(-Z)