


Multimode 10Gig LC/LC Duplex Patch Cable

OM4

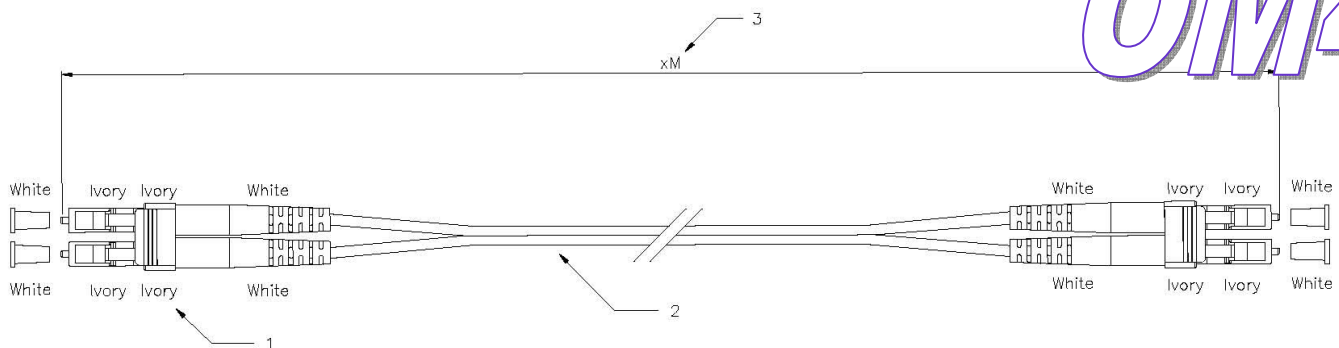

These stock cables are using Bend Insensitive material

Product Overview

Fiber optic patch cords or jumpers are ideal for short distance patching applications. Fiber optic cable is made using exclusively Corning Optical Glass, within UL certified OFNR (Riser) rated jacket with Kevlar yarn. All fiber optic patch cables carry a Lifetime Warranty*

Performance Specifications

Insertion Loss (max.):	0.5dB
Storage Temperature:	-40°C +80°C
Operation Temperature:	-20°C +70°C
Mating Durability:	<0.2dB
Attenuation dB/km max.:	1.0

Connector Specifications

Connector Type (1):	LC/UPC
Connector Style(1)::	Duplex w/ Clip
Ferrule Type (1):	Ceramic
Connector Type (2):	LC/UPC
Connector Style (2):	Duplex w/ Clip
Ferrule Type (2):	Ceramic

Fiber Specifications

Wavelength:	850nm/10Gig
Core Diameter:	50µm
Cladding Diameter:	125µm
Glass Buffer Size:	900µm
Inner Strength Material:	Kevlar
Glass Type:	OM4 Infinicor SX+

Ordering Specifications

Part Number	Length (m)
GS-LC2-xx-10G	xx = Length

Jacket Specifications

Jacket Size:	2mm
Jacket Style:	Zip Duplex
Jacket Color:	Aqua
Fire Rating:	OFNR (Riser)

Lifetime Warranty: Limited to the replacement of the cable for manufacturers defect or performance defect. CP technologies will not be liable for any additional costs incurred for replacement of defective cable.

Stock FIBER CABLEs

- Built to exceed industry standards
- Insertion loss and reflectance on all connectors are tested for optimum performance guarantee
- UPC—Ultra Polished Connectors
- Typical Shipping: 1-2 Business Days